

Adjust Abil roof ladder


Telescopic Multi Purpose
& Roof Access Ladder



adjustability



roofability

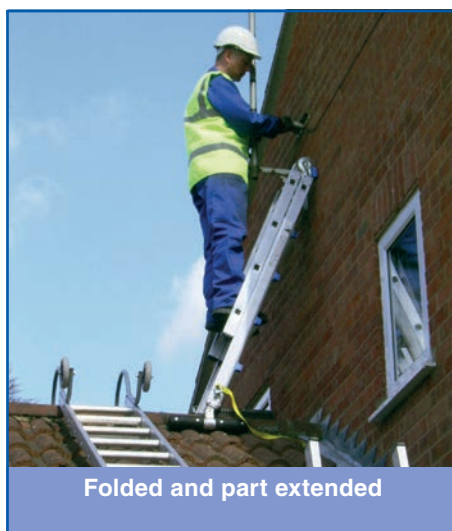

Facts and stats

Adjustability weight:	12.75kg
Roofability weight:	10.07kg
Stored size:	Length 1350mm Width 360mm Width 560mm with stabiliser bar Depth 280mm
Height as stepladder:	970mm min. 1700mm max.
Height as ladder:	2135mm min. 3650mm max.
Height as roof access ladder:	1065mm min. 2900mm max.
Adjustments:	250mm increments/rung spacings
Maximum load:	150kg (23.5 stone)
Classification:	EN131



Training and risk assessments

The regulations and HSE require that operatives are trained and a risk assessment is conducted for all work at height.

Note: **Ability International Limited is a training provider accredited to BS EN ISO 9001:2008 and the Safecontractor accreditation scheme.**

Applications and use

For: Chimney sweeps, flue liners, inspections and other chimney requirements.
TV aerial and satellite dish installations.
Loft access and inspections.
Decorating and general access.

Price effective January 2014 (excluding VAT) £262.00
Carriage (inclusive UK mainland)
Price includes 1 no. Cambuckle Strap for tying-in the Abil ladder.

